

SUPPORT FOR PLACEMENT OF UPPER AND LOWER LIMBS

Support for placement manufactured in foam having different density and lift for keeping the proper effectiveness against decubitus. Waterproof film at high transpiration.

Ref. 4480 e 4460

Supports to hold in rest position the lower limb, anti-rotation control with optimal alignment foot-leg. Total discharge of the heel pressure. Medium inclination of the cradle for a proper venous upthrust. Aluminium reinforcement plate, entirely protected and designed for the traction cable entry.

Ref. 4480

External dimensions : cm $80 \times 23 \times 37$ Support size of internal cradle: cm 65×15 Size for discharge area heel: cm $8 \times 15 \times 9$

Ref. 4460

External dimensions : cm $65 \times 23 \times 37$ Support size of internal cradle: cm 50×15 Size for discharge area heel: cm $8 \times 15 \times 9$

Ref. 4450

Supports to hold in rest position the upper limb.

inclination of the cradle for a proper

venous upthrust


External dimensions : cm $64 \times 20 \times 25$ Support size of internal cradle: cm 56×12

Small cylinder per for the proper hand posture:

cm 6 x 10

cm 7 x 10

cm 8 x 10

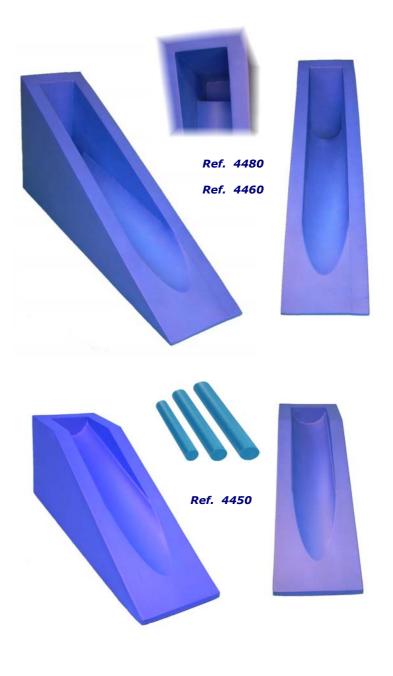

Copyright 2010 – Edition COREMEC S.r.l. – SP63_/r0/ita/2010 – All rights reserved

COREMEC s.r.l

Manufacturing Plant & Administration
Via Cacciatori, 74/76 - 10042 Nichelino (TO) - Italy
Phone ++39 011.35.89.481
Fax ++39 011.35.89.483
www.coremec.it e-mail coremec@coremec.it



COREMEC s.r.l. Export Department

e-mail: export@coremec.it