

Light SOLIS 30

Simple, usefull, reliable

Wherever you need to conduct a clinical exam, SOLIS 30 will be at your side to guarantee optimal lighting in all situations.



DESIGN


The round and ultra-flat shape of the light makes the product ergonomic and suitable for any type of installation. Smooth and rounded shape of the dome make it easy to clean and disinfect.

SHADOWS

The radial layout of the lenses and lamp diameter permit shadow suppresion and three-dimensional lightnig.

Technical data

Light intensity at 0,5 m	92 000 lux
Light intensity at 1 m	30 000 lux
Color temperature	4000 K
Color rendering index (CRI)	95
d 10 light field diameter (1m)	200 mm
control of the illuminance (%)	15-100% (fluent)
Power consumption	10 W
Standards	IEC 60601-2-41
Product class	Ι
LED life	40 000 h

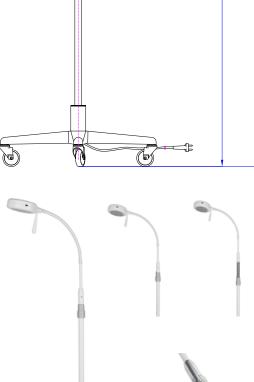

ЪН

Solis 30 F - mobile Solis 30 X - rail mounted





FABRYKA APARATURY ELEKTROMEDYCZNEJ FAMED Łódź S.A. ul. Szparagowa 2, 91-211 Łódź adres korespondencyjny: ul. Ciasna 21 a 93-531 Łódź, POLSKA





Magda Koczorowicz 605 592 783 m.koczorowicz@famed.pl Andrzej **Kamiński** 728 39 08 85 a.kaminski@famed.pl Andrzej **Jantas 784 012 501** a.jantas@famed.pl