


Lampade scialitiche a Led per S. O. e area di emergenza



- Solis 160 F** Cupola a Led - 160.000 lux, su stativo con ruote, con alimentazione
- Solis 160 FA** Cupola a Led - 160.000 lux, su stativo con ruote, con alimentazione e batteria emergenza
- Solis 160 W** Cupola a Led - 160.000 lux, fissaggio a parete, con alimentazione
- Solis 160 C** Cupola a Led - 160.000 lux, fissaggio a soffitto, con alimentazione
- Solis 160/60 C** Doppia Cupola a Led - 160.000 lux + 60.000, fissaggio a soffitto con alimentazione
- Solis 160/160 C** Doppia Cupola a Led - 160.000 lux cad., fissaggio a soffitto con alimentazione

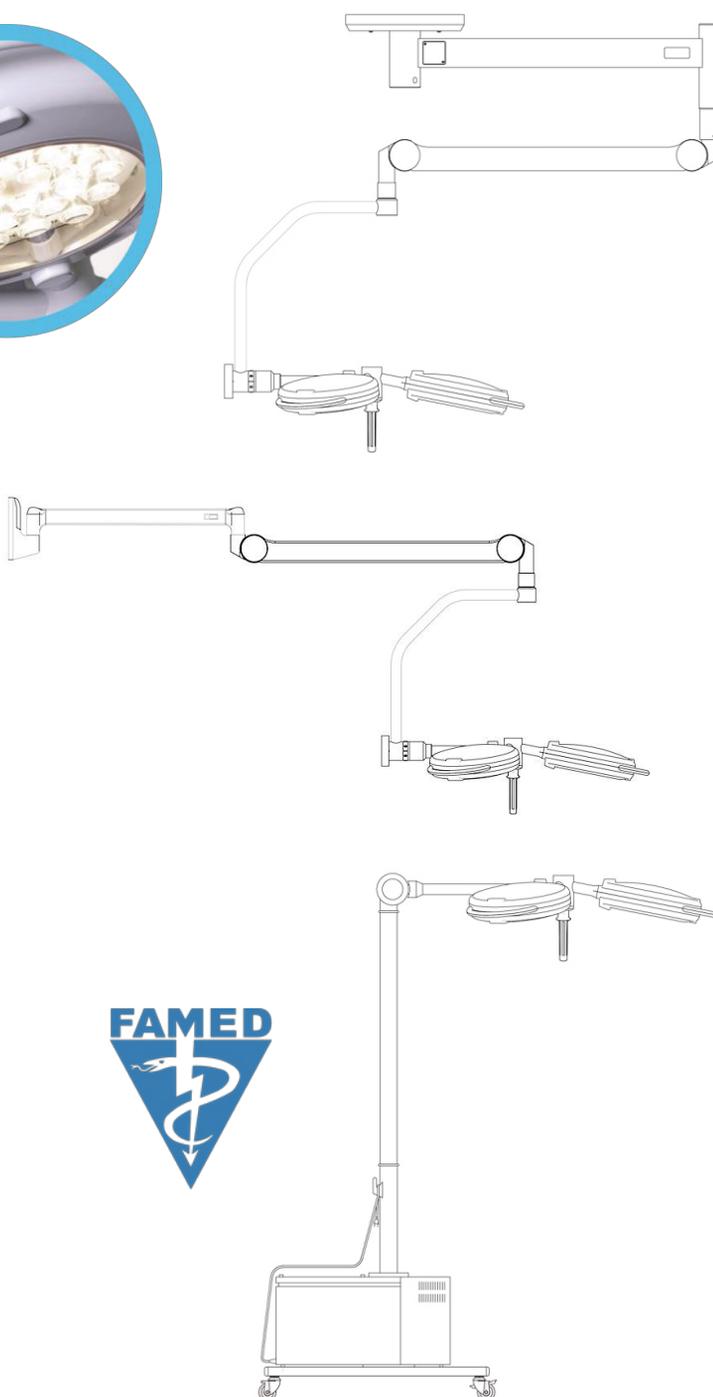

Lighthead	SOLIS 160
Supply voltage	24V DC
Light intensity at a distance of 1 m (Ec)	160 000 lux
Adjustable light intensity	25 ÷ 100%
Colour rendering index Ra	96
Colour temperature	const. 4400 K
Operating field diameter d10	210 mm
Light spot diameter d50	105 mm
Adjustable diameter of the operating field	yes
Temperature increase near surgeon's head	< 1°C
Depth of illumination L1+L2 (20%)	68 cm
(60%)	47cm
Power consumption for the lighthead	52 W
Insulation class	I
Protection degree provided by lighthead enclosure	IP 43